



www.kooltekcoolers.com


P: 877- Kool-Tek F: 813-298-1993
(566-5835)

info@KoolTekCoolers.com



Technical Bulletin G2-3

G2 Countertop Water Cooler Hot Tank Removal Instructions

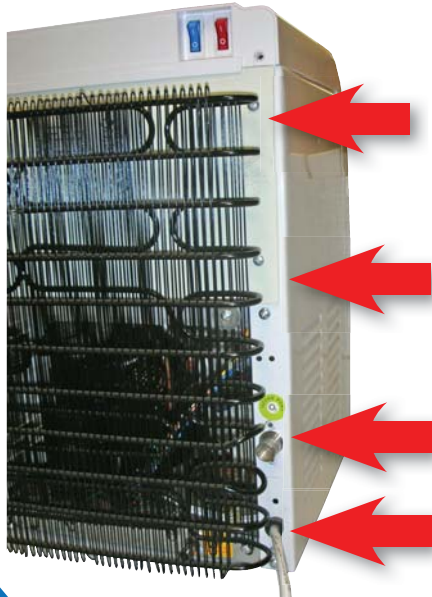

STEP 1

Remove lid.
Facing the back of the cooler, remove all screws on the back right side of the cooler including screws to the ozone port. (No need to remove screws holding the thermostat.)




STEP 2

Remove all screws holding the coils on the back and carefully pull the coils out of the way.



STEP 3

Remove all screws to the face plate, 2 on the top and 2 on the bottom.

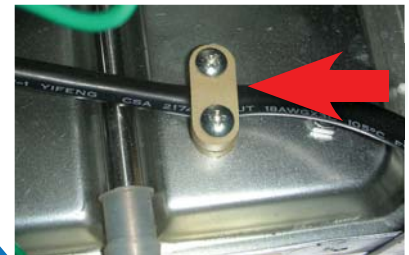

STEP 4

Remove screws holding power cord in place.



STEP 5

Remove ties and silicone going to the tank.
Remove ties and silicone from ozone port tube and hot tank






www.kooltekcoolers.com

P: 877- Kool-Tek F: 813-298-1993 info@KoolTekCoolers.com
(566-5835)



Technical Bulletin G2-3

G2 Countertop Water Cooler Hot Tank Removal Instructions

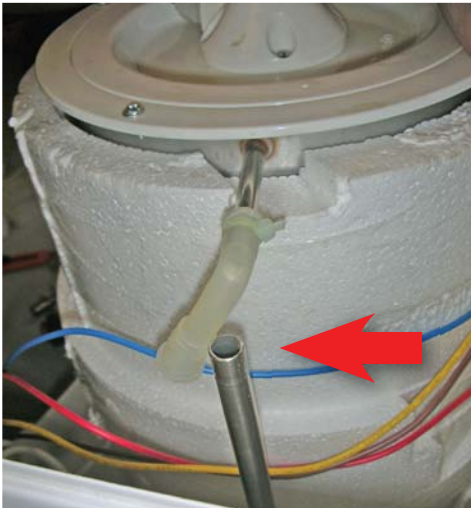

STEP 6

Remove ties and fittings from overflow.



STEP 7

Remove ties and fittings from faucet.



STEP 8

Remove screws holding hot tank in place located at the bottom of the pan.



STEP 9

Remove the 3 screws on the front of the side panel.



STEP 10

Move side panel out of the way and remove hot tank.

Mark wire locations for proper installation.

Follow these steps in reverse order to reinstall replacement hot tank.