



Phone: 877-KoolTek  
Fax: 813-298-1993  
[www.kooltekcoolers.com](http://www.kooltekcoolers.com)

## Technical Bulletin G2-2

### Hot Tank Removal Instructions

#### STAGE 1



1. Remove Top Screws



2. Remove two screws on the bottom of the face plate.



3. Remove the two screws holding face-plate on the inside.



4. Remove door from face plate and hinge. For best practice use masking tape to hold pins in place

#### STAGE 2



Follow the wiring diagram for hot tank.

- STAT #86 (Top)
- STAT #96 (Bottom)

NOTE: Wiring color may vary. Location is key.

## STAGE 3




1. Remove pipe from cold tank.



2. Remove pipe from hot tank.



3. Remove silicon fitting from overflow.

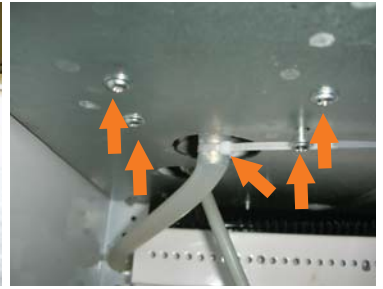

4. Remove drain tube from tank. removes screws holding tank to mid pan.

## STAGE 4



Remove screw from front of plastic tray.

## STAGE 5



Lift plastic tray and remove hot tank fill pipe from cold tank.

## STAGE 6



Remove hot tank.

**Follow the above steps in reverse order to reinstall replacement hot tank.**



**Phone: 877-KoolTek**

**Fax: 813-298-1993**

**[www.kooltekcoolers.com](http://www.kooltekcoolers.com)**